





Rücklauffilter HF 554-20.280 2 Loch

FG025

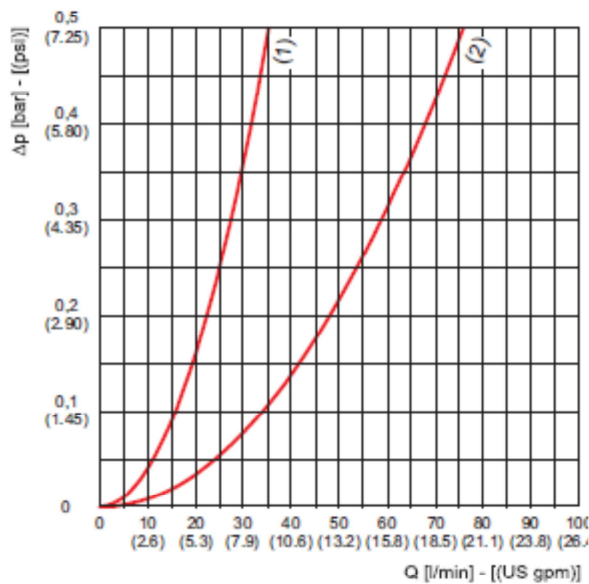


HF 554-20.201 / 20.280

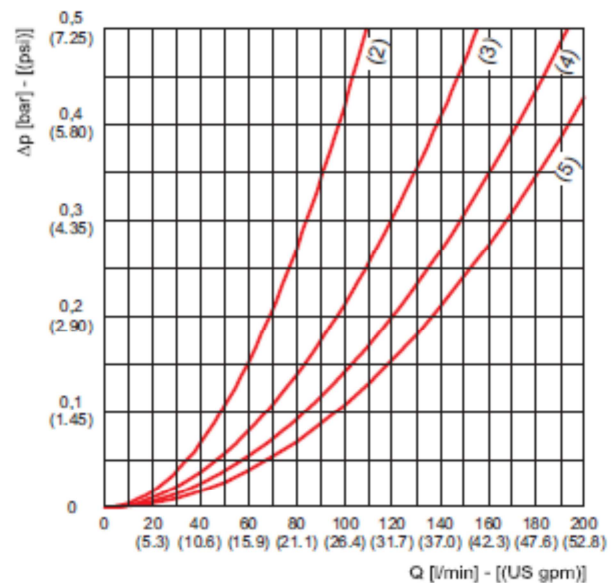

Flows

Filter type	Inlet port		Degree of filtration						
			FG003	FG006	FG010	FG025	RP/SP010	RP/SP025	
			Flow						
			$\Delta p = 5.8 \text{ psi (0.4 bar)}$ (values referred to standard filtering surfaces)						
	GAS (BSPP)	NPT	SAE J514b	US gpm (l/min)					
HF 554-20.280	G 1/2	1/2 NPT	3/4-16 UNF-2B	19.8 (75)	19.8 (75)	22.5 (85)	22.5 (85)	22.5 (85)	25.1 (95)
	G 3/4	3/4 NPT	1 1/16-12 UNF-2B	22.5 (85)	25.1 (95)	27.7 (105)	30.4 (115)	30.4 (115)	34.3 (130)
	G 1	1 NPT	1 5/16-12 UNF-2B	25.1 (95)	27.7 (105)	31.7 (120)	35.7 (135)	35.7 (135)	40.9 (155)
	G 1 1/4	1 1/4 NPT	1 5/8-12 UNF-2B	26.4 (100)	29.1 (110)	33.0 (125)	38.3 (145)	38.3 (145)	46.2 (175)

HF 554-20 DIMENSIONS

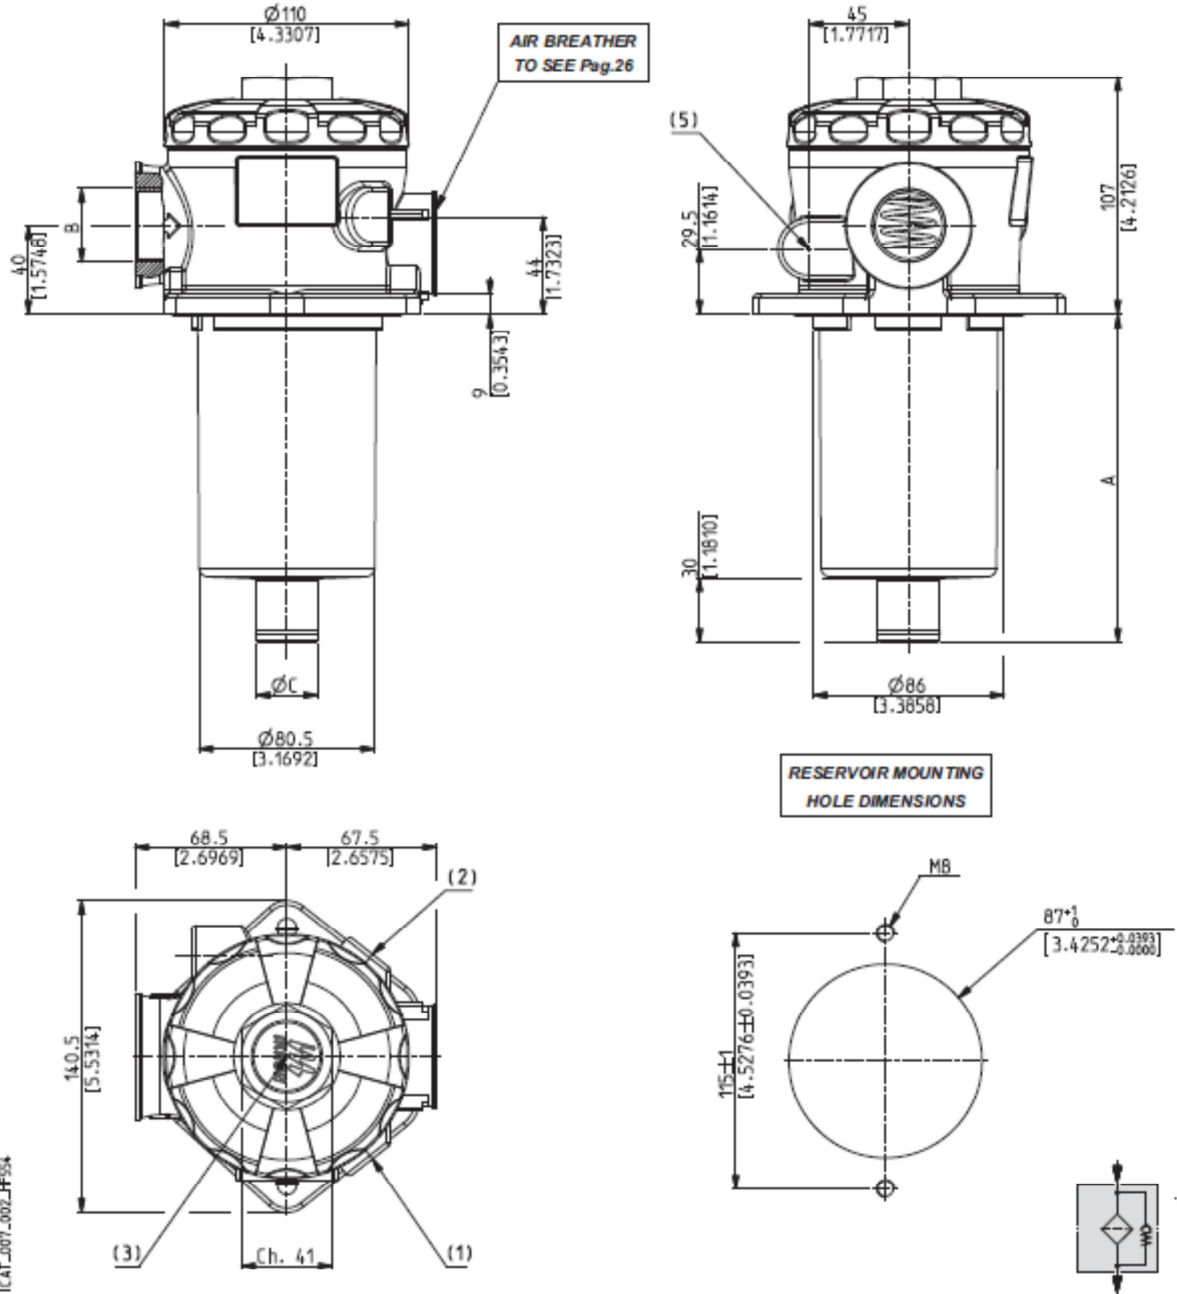

Filter type	Weight	A	B (GAS-BSPP)		$\varnothing C$	(3)(5)(GAS-BSPP)	(1)(2)(3)(GAS-BSPP)
	kg(lbs)	mm(in)	Standard	On request		Secondary inlet	Indicators
HF 554-20.077	1.21 (2.67)	103 (4.0551)	G 3/4	G 1/2 - G 1 - G 1 1/4	27.5 (1.0826)		
HF 554-20.122	1.30 (2.86)	148 (5.8267)	G 1	G 1/2 - G 3/4 - G 1 1/4		G 3/8 G 1/2	G 1/8
HF 554-20.201	1.45 (3.20)	229 (9.0157)	G 1 1/4	G 1/2 - G 3/4 - G 1	40 (1.5747)		
HF 554-20.280	1.67 (3.68)	312 (12.2834)					

NPT, metric and SAE UN-UNF threads are available (consult our technical department).