



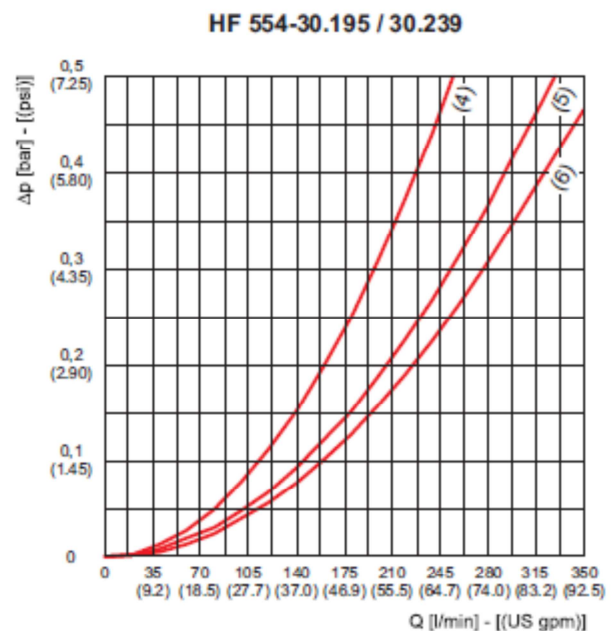


Rücklauffilter HF 554-30.239 3 Loch

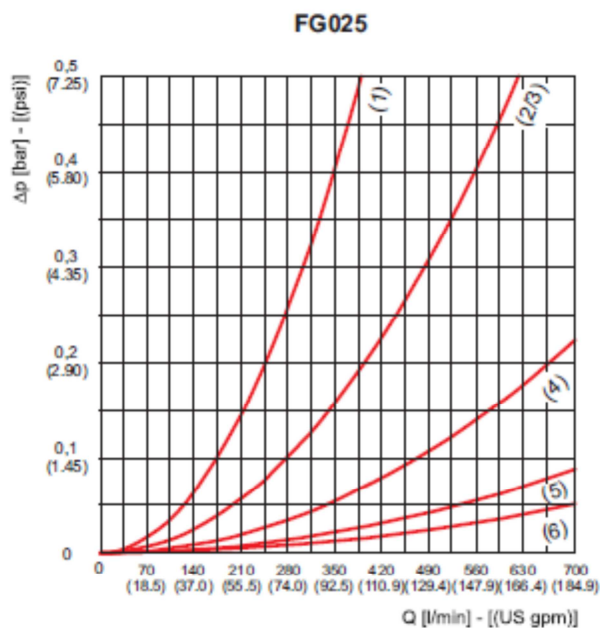

FLOWS

Filter type	Inlet port			Degree of filtration					
				FG003	FG006	FG010	FG025	RP/SP010	RP/SP025
	Flow			Δp = 5.8 psi (0.4 bar) (values referred to standard filtering surfaces)					
	US gpm (l/min)								
HF 554-30.239	GAS (BSPP)	NPT	SAE J514b						
	G 1	1 NPT	1 5/16-12 UNF-2B	42.3 (160)	44.9 (170)	50.2 (190)	52.8 (200)	52.8 (200)	58.1 (220)
	G 1 1/4	1 1/4 NPT	1 5/8-12 UNF-2B	47.5 (180)	50.2 (190)	55.5 (210)	63.4 (240)	60.8 (230)	71.3 (270)
	G 1 1/2	1 1/2 NPT	1 7/8-12 UNF-2B	50.2 (190)	52.8 (200)	60.8 (230)	66.0 (250)	66.0 (250)	76.6 (290)

HF 554-30 DIMENSIONS

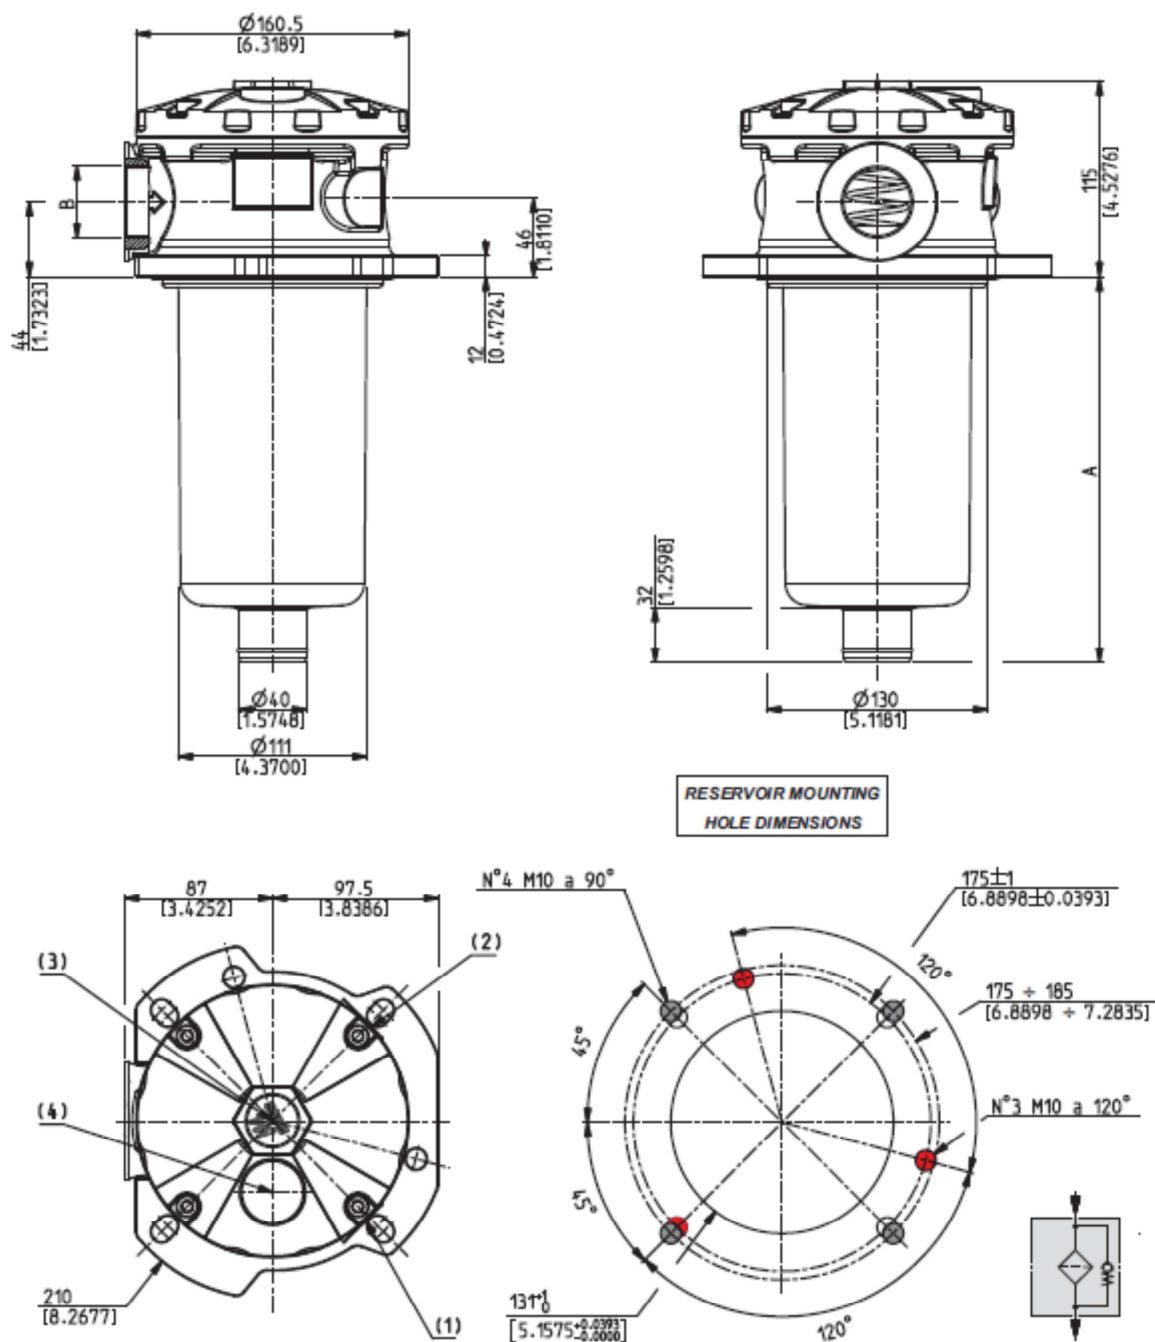

Filter type	Weight	A	B (GAS-BSPP)		(1)(2)(4)(GAS-BSPP)	(1)(2)(3)(GAS-BSPP)	(4)(GAS-BSPP)
					Secondary inlet	Indicators	Filler cap
	kg(lbs)	mm(in)	Standard	On request			
HF 554-30.195	3,44 (7.58)	226,5 (8.9172)	G 1 1/4	G 1 - G 1 1/2	G 3/8 Pos.(1)-(2) G 1/2 Pos.(1)-(2) G 3/4 Pos.(4)	G 1/8	G 3/4
HF 554-30.239	3,63 (8.00)	269,5 (10.6102)	G 1 1/2	G 1 - G 1 1/4			

NPT, metric and SAE UN-UNF threads are available (consult our technical department).