


BTX 12-75LS

12V-75Ah • High Rate
1490W @ 15 minutes



Member of the WETAC Group

einfach stark.

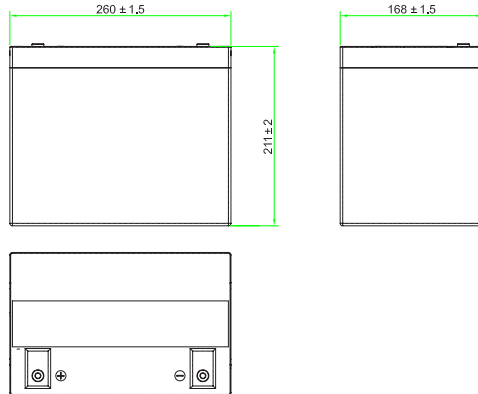

Electrical Specifications

Nominal Voltage		12 V
Nominal Capacity (10hr 1,8V/C at 25°C)		73,0 Ah
Capacity at 25°C to 1,8V	20 hour rate	79,2 Ah
	10 hour rate	73,0 Ah
	8 hour rate	70,2 Ah
	3 hour rate	57,9 Ah
	1 hour rate	46,2 Ah
Self discharge @ 20°C	per month	2 - 2,5 %
Internal Resistance		5 mΩ
Short Circuit Current		>1250 A
Charge Voltage @25°C	Standby (-3mV/°C)	2,29 V/Cell
	Cyclic I _{max} : 22,5A (-3mV/°C)	2,40 V/Cell


Innovative Features

- Design life up to 12 years (High Performance)
- BTX-LS batteries are maintenance free
- High Discharge Rate
- Lead-Calcium casted grids
- AGM separators for improved electrolyte distribution
- BTX-LS Capacity range: 17-200Ah
- Designed in conformance with the DIN EN 60896-2:1997 standard
- Extremely low gassing
- Reduced self discharge
- 100% recyclable
- No limitations for transport via road, rail, boat or air

Other Specifications

Design Life		up to 12 Years
Dimensions	LxWxH	260*168*211 mm
	Total height	224 mm
Operating Temperature		-20 to +50 °C
Separator		Absorbant Glass Mat
Grid alloy		Calcium / Tin lead alloy
Case and cover		ABS
Electrolyte		Sulphuric Acid
Terminal		M6 insert
Optional terminal types		Cu/Lead Flag
Torque setting		7 - 9 Nm
Weight		24,0 Kg

Discharge Curve @ 20°C

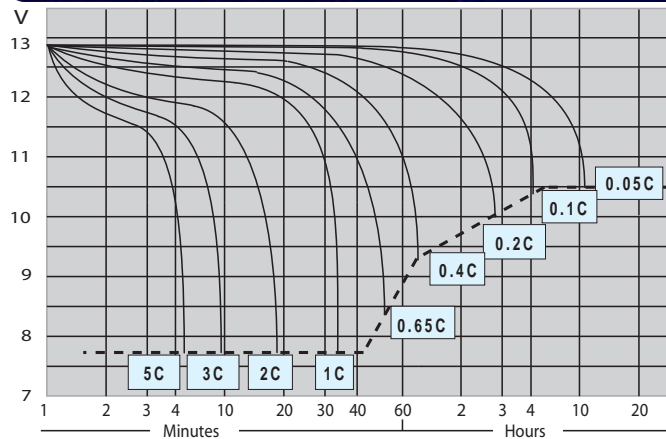

Constant Power Discharge - Watts per Cell at 20°C

V/Cell	5 min	10 min	15 min	30 min	45 min	1 hr	2 hr	5 hr	10 hr	20 hr
1,65 V	415	308	239	148	112	91,6	53,0	27,5	16,4	9,0
1,70 V	396	296	230	143	109	89,0	51,6	26,9	16,1	8,9
1,75 V	378	284	222	138	105	86,4	50,2	26,2	15,8	8,7
1,80 V	359	272	213	133	102	83,8	48,8	25,6	15,1	8,6

Revision: 04-2013