


RPower OGiV121200LP

(12V 120Ah AGM Battery)

Floating Life at 20°C designed for 10-12 years

EAN: 4260349823449


Dimensions

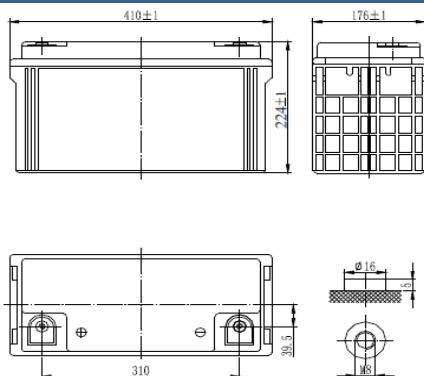


Specifications

Nominal Voltage		12V
Capacity (10hr@25°C@1.80V/C)		120Ah
Dimensions	Length	410mm (16.1inch)
	Width	176mm (6.93inch)
	Height	224mm (8.82inch)
	Total Height	224mm (8.82inch)
Approx. Weight		36.00kg (79.37lbs)
Maximum charging current		36.0A
Maximum discharge current		950A (5sec.)
Internal resistance		Approx. 5.3mΩ
Capacity affected by temperature (20hr)	40°C	103%
	25°C	100%
	0°C	86%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ±3°C (77°F±5°F)
Operating temperature range		-20°C~55°C (-4°F~131°F)
Float charging voltage (25°C)		13.65 to 13.80V
Cyclic charging voltage (25°C)		14.40 to 15.00V
Terminal material		Copper


The Relationship for Charging Voltage and Temperature

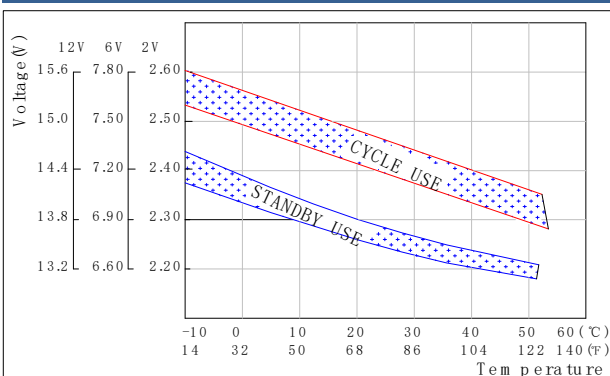

Charging Characteristics (25°C)

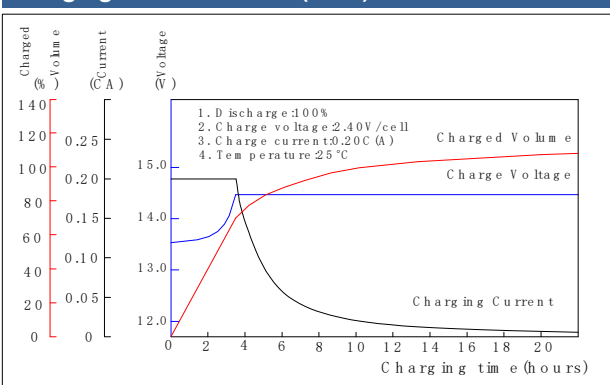

Discharge Characteristics (25°C)

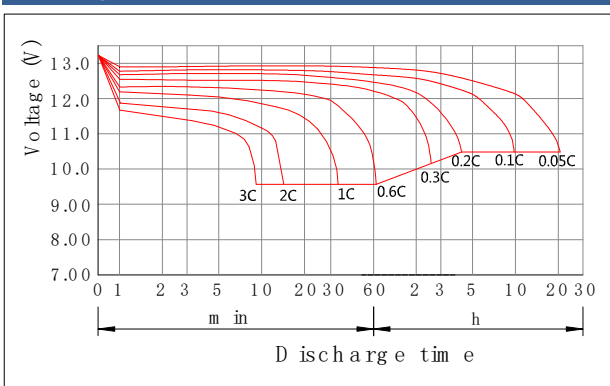

Constant Current Discharge Characteristics (Ampere / Battery, 25°C)

FV / TIME	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
10.98V	--	214,37	186,24	132,89	110,58	76,53	70,52	36,28	28,42	21,92	19,69	16,30	13,19	11,64	6,17
10.80V	--	221,00	192,00	137,00	114,00	78,90	72,70	37,40	29,30	22,60	20,30	16,80	13,60	12,00	6,36
10.50V	--	236,00	201,00	144,00	116,00	81,00	75,10	39,80	30,10	24,00	20,70	17,30	14,00	12,20	6,44
10.20V	--	251,00	210,00	150,00	121,00	83,80	77,40	40,70	30,80	24,50	21,10	17,80	14,20	12,40	6,50
9.90V	--	266,00	219,00	156,00	125,00	86,10	79,00	41,40	31,40	24,90	21,50	18,10	14,50	12,50	6,54
9.60V	--	281,00	228,00	158,00	129,00	87,70	79,60	41,90	32,10	25,10	21,80	18,20	14,60	12,60	6,58

Constant Power Discharge Characteristics (Watt / Battery, 25°C)

FV / TIME	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
10.98V	--	2339,64	2037,00	1478,28	1251,30	919,56	843,90	476,66	340,47	250,26	242,11	186,82	151,32	129,79	68,68
10.80V	--	2412,00	2100,00	1524,00	1290,00	948,00	870,00	491,40	351,00	258,00	249,60	192,60	156,00	133,80	70,80
10.50V	--	2580,00	2178,00	1620,00	1332,00	966,00	900,00	496,20	357,00	262,20	252,00	195,00	159,00	136,80	71,40
10.20V	--	2724,00	2256,00	1680,00	1380,00	990,00	924,00	505,20	361,20	267,60	253,20	199,20	160,80	138,00	72,00
9.90V	--	2874,00	2334,00	1734,00	1416,00	1008,00	936,00	514,80	365,40	273,00	255,60	202,20	162,60	139,20	73,80
9.60V	--	3024,00	2412,00	1794,00	1464,00	1032,00	954,00	524,40	369,60	281,40	256,80	204,60	164,40	139,80	76,20

Bern
CTA Energy Systems AG
Hunzikenstrasse 2
3110 Münsingen
Telefon 031 720 15 50
Fax 031 720 15 51

Zug
CTA Energy Systems AG
Bösch 41
6331 Hünenberg
Telefon 041 766 40 00
Fax 041 766 40 09

Version: 2015-09

usv.ch

CTA
Energy Systems

www.usv.ch info@usv.ch